


## Venturi-effect suction unit

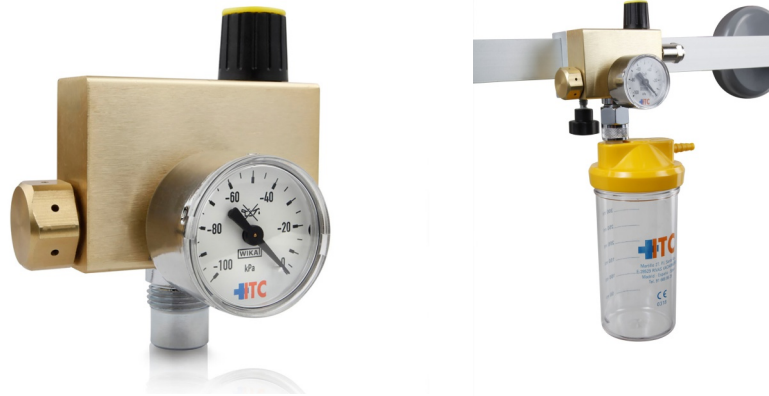

This device produces suction through the Venturi-effect. It is designed to be used with a pressurized medical air or oxygen source, rather than a vacuum piped net.

- It has an upper valve and a vacuum gauge to regulate and measure the pressure of suction.
- It can be mounted on a clamp with a clamp and can be supplied by a 1m-long vacuum hose. It can be set with different European and American connectors (*see Connectors and valves*).
- Classified as **Medium Vacuum / High Flow**

### TECHNICAL SPECIFICATIONS

- Manufactured in *anodized aluminium, brass, ABS and NBR*.
- Vacuum DISS connector for collection jar (jar not included).
- **Optimal inlet pressure:** from 400 to 500 kPa.
- **Maximum reachable vacuum:** 60 kPa.
- **Flow range:** from 0 to 80 l/min.
- **Approximate consumption:** between 30 and 35 l/min depending on the supplied pressure.
- Dimensions: 100 x 85 x 75 mm
- **Weight:** 385 g (without connector).
- In compliance with the **UNE-EN ISO 10079-3** standard.