
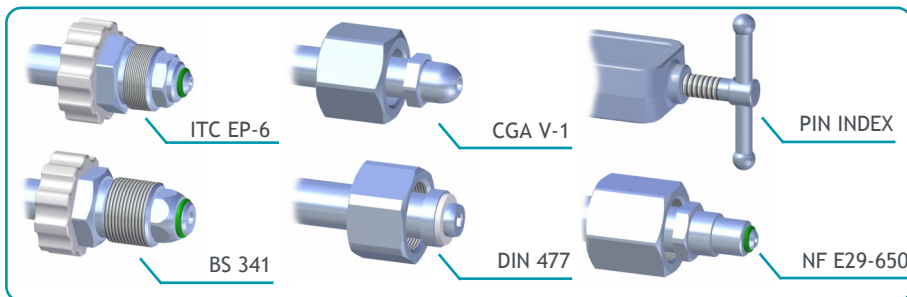


Gas regulator fixed output with ball flowmeter

JUST PRESS B regulators are specially designed for their use in hospital facilities with no oxygen piped network available, not recommended for care therapy services.

- Piston gas regulators for its use on oxygen cylinders at 200 bar with a Spanish standard connector (*please consult our staff about other connections*).
- They incorporate a ball flowmeter, which is 360° twistable to facilitate the measurements. Available with 4, 6 or 15 l/min scales.
- They also have a pressure gauge to read the pressure of the bottle.

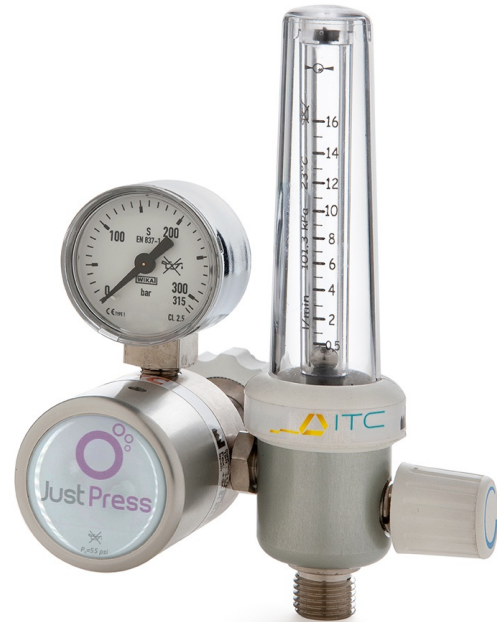

TECHNICAL SPECIFICATIONS

- Manufactured in *anodized aluminium, Polycarbonate, Polyamide, stainless steel and chromed brass.*
- **Outlet connection:** DISS 9/16" with a tubing nozzle for removable tube.
- **Precision:** $\pm 10\%$.
- **Maximum inlet pressure:** 200 bar.
- **Available flows:**
 - 0 - 4 l/min (max < 8 l/min)
 - 0 - 6 l/min (max < 10 l/min)
 - 0 - 15 l/min (max < 25 l/min)
- **Inlet standards:**
 - ITC EP-6
 - BS-341o DIN 477
 - ISO 5145
 - CGA V-1
 - NF E29-650
 - Other available on demand
- **Point of design:** 4.5 ± 0.5 bar
- **Calibration:** 101,3 kPa and 23 °C.
- **Dimensions:** 145 x 180 x 100 mm
- **Weight:** 655 g.
- In compliance with **UNE-EN ISO 10524** and **UNE-EN ISO 15002** standards.