


## Gas regulator fixed output with double outlet ball flowmeter

**JUST PRESS B** are specially designed to be used in medical facilities with no oxygen piped network available, not recommended for home care therapy services.

- Piston gas regulators for its use on oxygen cylinders at 200 bar with a Spanish standard connector (*consult our staff about other connections*).
- They have a flowmeter with 4, 6 or 15 l/min scales, 360° twistable to facilitate measurements.
- Also incorporates a pressure gauge to read the pressure of the bottle.
- The flowmeter has an inferior outlet for a humidifier bottle (*not included*) and a side one for a nebulizer, which can be easily selected by means of a quarter of a turn revolver.

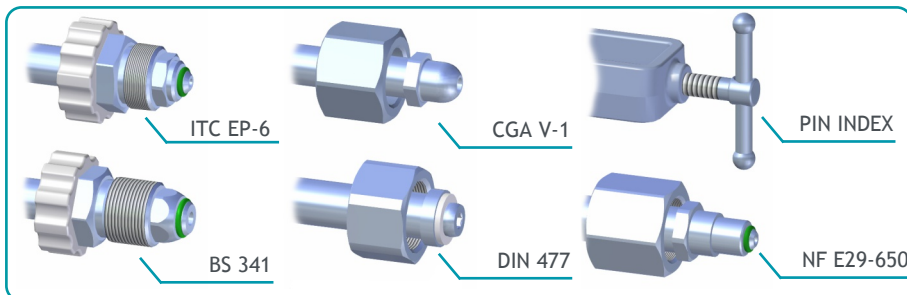

### TECHNICAL SPECIFICATIONS

- Manufactured in *anodized aluminium, polycarbonate, ABS, Polyamide and chromed brass.*
- DISS 9/16" outlet connection with a detachable tube pin.
- **Maximum low flow:** 20 l/min.
- **Precision:** ± 10 %.
- **Maximum supply pressure:** 200 bar.
- **Available flows:**
  - 0 - 4 l/min (max < 8 l/min)
  - 0 - 6 l/min (max < 10 l/min)
  - 0 - 15 l/min (max < 25 l/min)
- **Inlet standards:**
  - ITC EP-6
  - BS-341
  - DIN 477
  - ISO 5145
  - CGA V-1
  - NF E29-650
  - Other available on demand
- **Point of design:** 4.5 ± 0.5 bar.
- **Calibration:** 101,3 kPa and 23 °C.
- **Dimensions:** 145 x 180 x 100 mm
- **Weight:** 990 g.
- In compliance with **UNE-EN ISO 10524** and **UNE-EN ISO 15002** standards.